


RVF / RVF EC Series

Exterior-Mount Fan

STANDARD FEATURES

- Galvanized steel housing with powder coat finish
- Powered by external rotor motorized impeller
- Permanently lubricated sealed ball bearings
- 100% speed controllable
- BMS compatible (EC models)

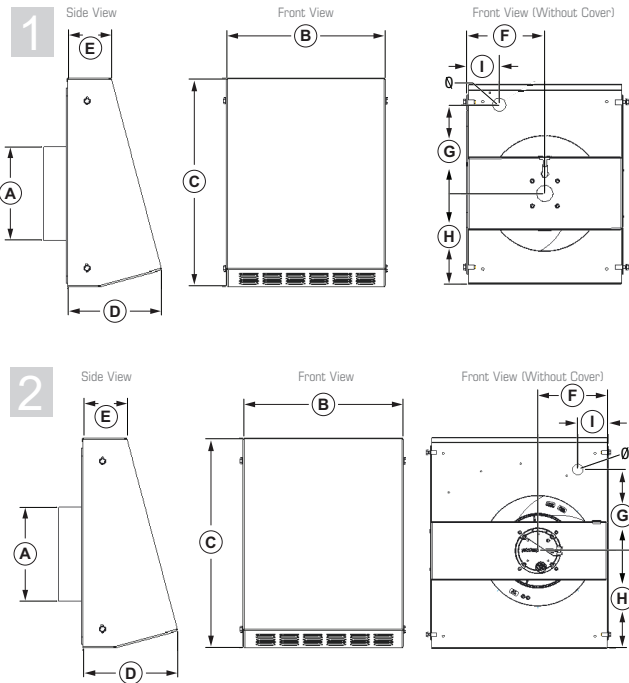

Systemair MFG Inc. certifies that the RVF EC Series and the RVF 10, 10L, and 10XL shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211/311 and comply with the requirements of the AMCA Certified Ratings Program.

Performance certified for installation type C- Ducted inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories).

Model	A	B	C	D	E	F	G	H	I	Ø	Weight
RVF 4 ¹	4	10 1/4	13	6	2 3/4	5 1/8	6 1/2	4 1/16	1	7/8	8
RVF 4XL ¹	4	10 1/4	13	6	2 3/4	5 1/8	5 1/4	5 1/4	1	7/8	10
RVF 4XL-EC ¹	4	10 1/4	13	6	2 3/4	5 1/8	5 3/4	5 7/8	2 1/8	7/8	8
RVF 6 ¹	6	10 1/4	13	6	2 3/4	5 1/8	5 1/4	5 9/32	1	7/8	10
RVF 6XL ²	6	14 3/8	17 1/4	8 1/8	4 7/8	5 5/8	6 1/2	7 13/16	2 1/2	7/8	14
RVF 8XL ²	8	14 3/8	17 1/4	8 1/8	4 7/8	5 13/16	6 1/2	7 13/16	2 1/2	7/8	14
RVF 6XL-EC ²	6	14 3/8	17 1/4	8 1/8	4 7/8	5 5/8	6 1/2	7 13/16	2 1/2	7/8	19 1/2
RVF 8XL-EC ²	8	14 3/8	17 1/4	8 1/8	4 7/8	5 5/8	6 1/2	7 13/16	2 1/2	7/8	20
RVF 10-EC ²	10	17 7/8	21 1/4	10	5 7/8	7 3/8	8 1/16	9 1/8	2 3/4	7/8	31
RVF 10 ²	10	17 7/8	21 1/4	10	5 7/8	7 3/8	8 1/16	9 1/8	2 3/4	7/8	31
RVF 10L ²	10	17 7/8	21 1/4	10	5 7/8	8 1/8	8 1/16	9 1/8	2 3/4	7/8	36
RVF 10XL ²	10	17 7/8	21 1/4	10	5 7/8	8 1/8	8 1/16	9 1/8	2 3/4	7/8	36

Dimensions are in inches. Weight is in pounds. Ø = Diameter of conduit hole.

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											

Accessory Items				1	2	3	4	Accessory Items				1	2	3	4

Project: _____ Submitted: _____
Customer: _____ Approved: _____
Location: _____

