


5BDD Series
Belt Drive Downblast Roof Ventilator



STANDARD FEATURES

- All ventilators are UL 705 Standard listed
- Durable spun aluminum construction with steel support braces
- Inlet temperatures up to 170°F
- Backward inclined aluminum fan wheel
- Equipped with a built-in bird screen to protect discharge

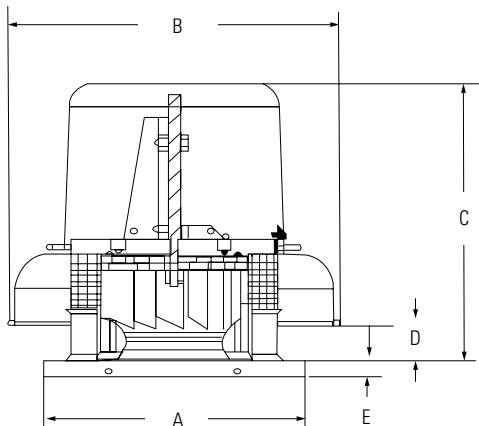

Model	A	B	C	D	E
5BDD 10	19	25 3/4	22 7/8	3	1 1/2
5BDD 12	22	28	23 3/8	3	1 1/2
5BDD 13	22	29 3/4	24 5/8	3 1/4	1 1/2
5BDD 15	26	31 11/16	27 3/8	3 3/4	1 1/2
5BDD 16	26	33 11/16	27 3/4	4 3/16	1 1/2

All dimensions in inches.

Model	A	B	C	D	E
5BDD 18	30	36	29 5/8	4 3/4	1 1/2
5BDD 20	30	38 1/4	30 1/4	5 1/4	1 1/2
5BDD 24	34	44 1/4	33	6 11/16	1 1/2
5BDD 30	42	51 7/16	37 1/2	8 13/32	1 1/2
5BDD 36	46	60	41 5/8	10 1/2	1 1/2

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											
4											

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4

Project: _____

Submitted: _____

Customer: _____

Approved: _____

Location: _____

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanafflakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
For updated documentation please refer to www.fantech.net

