


5BDU Series
 Belt Drive Upblast Roof Ventilator



STANDARD FEATURES

- All ventilators are listed UL 705 for electrical and UL 762 for restaurant exhaust in USA only
- Models 5BDU10 - 5BDU24 are suitable for wall mount application
- Inlet temperatures up to 300°F
- Fully welded windband
- Externally cooled motor compartment

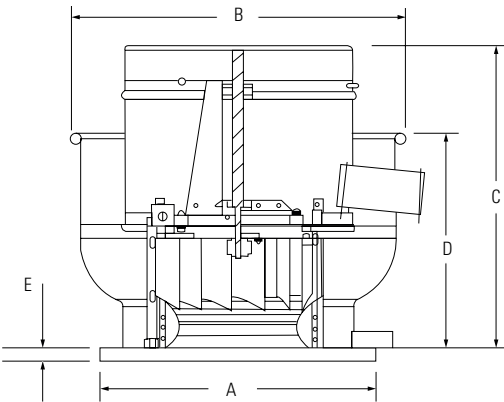

Model	A	B	C	D	E
5BDU 10	19	23 ⁷ / ₈	23 ³ / ₈	16 ⁷ / ₈	1 ¹ / ₂
5BDU 12	22	26 ¹ / ₂	24 ¹ / ₄	17 ³ / ₄	1 ¹ / ₂
5BDU 13	22	27 ⁷ / ₈	24 ⁵ / ₈	18 ¹ / ₂	1 ¹ / ₂
5BDU 15	26	29 ⁷ / ₈	27 ³ / ₈	19 ³ / ₈	1 ¹ / ₂
5BDU 16	26	31 ³ / ₄	27 ³ / ₄	20 ¹ / ₈	1 ¹ / ₂

All dimensions in inches.

Model	A	B	C	D	E
5BDU 18	30	34	29 ⁷ / ₈	21 ¹ / ₈	1 ¹ / ₂
5BDU 20	30	36 ¹ / ₂	30 ¹ / ₄	22	1 ¹ / ₂
5BDU 24	34	42 ³ / ₈	33	24 ¹ / ₂	1 ¹ / ₂
5BDU 30	42	49 ¹ / ₂	38 ³ / ₄	27 ¹ / ₂	1 ¹ / ₂
5BDU 36	46	58 ¹ / ₆	42 ⁷ / ₈	31 ¹ / ₂	1 ¹ / ₂

Fan Specifications							Motor Specifications				
Line	Qty	Model No.	Tag	CFM	SP	Fan RPM	Watts	Volts	Phase	Hertz	Encl
1											
2											
3											
4											

Accessory Items	1	2	3	4	Accessory Items	1	2	3	4

Project:

 Submitted:

Customer:

 Approved:

Location:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
 Canada 50 Kanalfarkt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech reserves the right to make technical changes.
 For updated documentation please refer to www.fantech.net

